

Please type a plus sign (+) inside this box ☐

PTO/SB/05 (12/97)  
Approved for use through 09/30/00. OMB 0651-0032  
Patent and Trademark Office: U. S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications 37 CFR 1.53(b))

Attorney Docket No.

BD-03533

Total Pages

14

First Named Inventor or Application Identifier

Andrews et al

Express Mail Label No.

EE098602824US

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning Utility patent application contents.

1. ☒ Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification [Total Pages 12] 1  
(preferred arrangement set forth below)

- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- References to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)

3. ☒ Drawing(s) (35 USC 113) [Total Sheets 2] 1

4. Oath or Declaration [Total Pages] 1

- a. ☐ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 CFR 1.63 (d))  
(for continuation/divisional with Box 17 completed)  
(Note For Box 5 below)

1. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting  
inventor(s) named in the prior application,  
37 CFR 1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (usable if Box 4b is checked)  
The entire disclosure of the prior application, from which a  
copy of the oath or declaration is supplied under Box 4b,  
is considered as being part of the disclosure of the  
accompanying application and is hereby incorporated by  
reference therein.

CERTIFICATION UNDER 37 CFR 1.10  
7. I hereby certify that this New Application Transmittal and the documents referred  
to as enclosed therein are being deposited with the United States Postal Service  
on this date July 31, 1998  
in an envelope as "Express Mail Post Office to Addressee" Mailing Label Number  
EE098602824US

addressed to the: Assistant Commissioner for Patents, Washington, D.C. 20231.

Suzanne G. Gendreau

(Type or print name of person mailing paper)

(Signature of person mailing paper)

## ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (When there is an assignee) ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
14. ☐ Small Entity Statement filed in prior application, Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)  
(If foreign priority claimed)
16. ☐ Other Information Disclosure Statement

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: \_\_\_\_\_

## 18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

NAME	Mary E. Porter			
	NORTON COMPANY			
ADDRESS	1 New Bond Street, P.O. Box 15138			
City	Worcester	STATE	Massachusetts	Zip Code 01615-0138
COUNTRY	U.S.A.	TELEPHONE	(508) 795-2555	FAX (508) 795-2653

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**FEE TRANSMITTAL**Patent fees are subject to annual revision on October 1.  
These are the fees effective October 1, 1997.Small Entity payments must be supported by a small entity statement,  
otherwise large entity fees must be paid. See Forms PTO/SB/09-12.  
See 37 C.F.R. §§ 1.27 and 1.28.**TOTAL AMOUNT OF PAYMENT** (\$ ) 790.00**Complete if Known**

Application Number	
Filing Date	
First Named Inventor	Andrews et al
Examiner Name	
Group / Art Unit	
Attorney Docket No.	BD-03533

**METHOD OF PAYMENT (check one)**

- 1.
- ☒
- The Commissioner is hereby authorized to charge indicated fees and credit any over payments to:

Deposit Account Number	14-1400
Deposit Account Name	NORTON COMPANY

- ☒
- Charge Any Additional Fee Required Under 37 C.F.R. §§ 1.16 and 1.17
- ☐
- Charge the Issue Fee Set in 37 C.F.R. § 1.18 at the Mailing of the Notice of Allowance

- 2.
- ☐
- Payment Enclosed:
- 
- ☐
- Check
- ☐
- Money Order
- ☐
- Other

**FEE CALCULATION****1. BASIC FILING FEE**

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
101 790	201 395	Utility filing fee	790
106 330	206 165	Design filing fee	
107 540	207 270	Plant filing fee	
108 790	208 395	Reissue filing fee	
114 150	214 75	Provisional filing fee	
<b>SUBTOTAL (1)</b>			<b>(\$ ) 790</b>

**2. EXTRA CLAIM FEES**

Total Claims	Extra Claims	Fee from below	Fee Paid	
12	-20** = 0	X	0	
Independent Claims	2	-3** = 0	X	0
Multiple Dependent				

\*\*or number previously paid, if greater; For Reissues, see below

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description
103 22	203 11	Claims in excess of 20
102 82	202 41	Independent claims in excess of 3
104 270	204 135	Multiple dependent claim, if not paid
109 82	209 41	** Reissue independent claims over original patent
110 22	210 11	** Reissue claims in excess of 20 and over original patent

**SUBTOTAL (2)** (\$ ) 0**FEE CALCULATION (continued)****3. ADDITIONAL FEES**

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
105 130	205 65	Surcharge - late filing fee or oath	
127 50	227 25	Surcharge - late provisional filing fee or cover sheet	
139 130	139 130	Non-English specification	
147 2,520	147 2,520	For filing a request for reexamination	
112 920*	112 920*	Requesting publication of SIR prior to Examiner action	
113 1,840*	113 1,840*	Requesting publication of SIR after Examiner action	
115 110	215 55	Extension for reply within first month	
116 400	216 200	Extension for reply within second month	
117 950	217 475	Extension for reply within third month	
118 1,510	218 755	Extension for reply within fourth month	
128 2,060	228 1,030	Extension for reply within fifth month	
119 310	219 155	Notice of Appeal	
120 310	220 155	Filing a brief in support of an appeal	
121 270	221 135	Request for oral hearing	
138 1,510	138 1,510	Petition to institute a public use proceeding	
140 110	240 55	Petition to revive - unavoidable	
141 1,320	241 660	Petition to revive - unintentional	
142 1,320	242 660	Utility issue fee (or reissue)	
143 450	243 225	Design issue fee	
144 670	244 335	Plant issue fee	
122 130	122 130	Petitions to the Commissioner	
123 50	123 50	Petitions related to provisional applications	
126 240	126 240	Submission of Information Disclosure Stmt	
581 40	581 40	Recording each patent assignment per property (times number of properties)	
146 790	246 395	Filing a submission after final rejection (37 CFR 1.129(a))	
149 790	249 395	For each additional invention to be examined (37 CFR 1.129(b))	
Other fee (specify) _____			
Other fee (specify) _____			
<b>SUBTOTAL (3)</b>			<b>(\$ ) 0.00</b>

\* Reduced by Basic Filing Fee Paid

**SUBMITTED BY**

Typed or Printed Name Mary E. Porter

Signature

Mary E. Porter

Date

7-31-98

**Complete (if applicable)**

Reg. Number 33,440

Deposit Account User ID

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

ROTARY DRESSING TOOL CONTAINING BRAZED DIAMOND LAYER

Inventors:

Richard M. Andrews

56 Upton Road  
Westborough, Massachusetts 01581

Sergej T. Buljan  
23 Washington Drive  
Acton, Massachusetts 01720

01720 23 Washington Drive  
Acton, Massachusetts 01720

## ROTARY DRESSING TOOL CONTAINING BRAZED DIAMOND LAYER

This invention relates to rotary dressing tools designed for truing and dressing the profiled faces of abrasive grinding wheels.

### Background of the Invention

Rotary diamond dressing tools impart the required form onto a grinding wheel and must be designed and made to specifications driven by the design of the grinding wheel. These tools have narrow quality specifications with low tolerances for deviations in geometry and mechanical attributes. Although dressing tools have been constructed in a variety of ways utilizing various materials and processes, most processes known in the art are demanding and inefficient.

For example, in one commercial process, diamond grains are hand set into a pattern in the cavity of a mold with an adhesive, then a powdered metal bond material is added and pressed into place around the diamonds. The pressed materials are densified by processes such as infiltration, hot pressing, sintering, or a combination thereof, to fix the diamonds in place and form the tool. In another typical process, a diamond layer may be set onto a custom designed mold and fixed in place by reverse electroplating. See, e.g., US-A-4,826,509. The sintering or plating step is followed by an extensive grinding step to remove grain high spots and to flatten the surface.

In another process described in U.S. Pat. No.-A-4,805,586, the diamond grains are pretreated to roughen and enlarge their surface area and to permit the grains to be arranged within the bond so that the majority of the grains are in direct contact with adjacent grains. These pretreated diamond grains are then electroplated to the surface of a base body with nickel or cobalt or alloys of nickel or cobalt.

In US-A-5,505,750, the diamond grains and metal powder bond are infiltrated with a near-eutectic copper-phosphorus composition during sintering.

Many powder metal matrix abrasive components for dressing tools utilize relatively small diamond grains (e.g., less than 0.5 mm in diameter) embedded within the powder matrix and the resulting composite is ground to the required geometry. Such abrasive components are not very sharp and grinding wheel dressing with them is relatively inefficient due to rapid wear of the tool. When such a powder matrix is used with large diamond grains, the finishing process loses considerable amounts of diamond as the composite is ground to the required geometry. It is not possible to

achieve a durable, fine (e.g., about 0.127 mm (0.005 inch)) dressing tip radius in tools made from diamond grains in a powder metal bond.

Polycrystalline diamond (PCD) inserts have been used to construct rotary dressing tools. PCD inserts are embedded in a powder metal matrix, sintered onto the tool, and then ground to the required geometry and surface finishing. See, e.g., US-A-4,685,440. PCD inserts offer a relatively flat surface and can be easily ground to the required geometry during finishing operations, or, for some shapes, can be provided as a near net shape piece. However, PCD is not 100% diamond. PCD material initially contains significant quantities (10-12 wt%) of metal catalyst and the metal catalyst is typically leached from the PCD material, leaving voids, to yield essentially pure diamond with a density of about 90 to 95 % of the theoretical density. Therefore, dressing tools made with PCD inserts lack the durability of dressing tools made with diamond abrasive grains which are fully dense, 100% diamond materials.

The rotary diamond tool for dressing abrasive wheels described in US-A-5,058,562 is made by using a chemical vapor deposition (CVD) process to deposit a layer of diamond film directly onto a base plate of the tool and assembling the base plate with a pair of backup plates to provide stiffness. With this approach, there are no diamond cutting points created, merely a hard, flat diamond surface. In a dressing tool, a flat diamond surface merely acts to crush the wheel face, rather than to cut bond and spent abrasive grains from the face and, thereby, open the face of the wheel for further grinding.

The rotary diamond tool for dressing abrasive wheels described in US-A-4,915,089 is made by forming a single layer of diamond grains in a plane orthogonal to the rotational axis of the tool. The layer of diamond grains is sandwiched between two layers of metal backup plates. The diamond layer is bonded to the plates by hot pressing the diamond grains and metal powder between the metal backup plates in a suitable mold to sinter the metal powder. The 4,915,089 patent mentions an alternative design wherein diamond grains are attached to one or both sides of the tool by plating or metal bonding, but teaches that the alternative design suffers the disadvantage of poor diamond retention. In the preferred design, arcuate segments of the laminated assembly of diamond grains and plates are brazed to the circumference of a disc-shaped metal wheel to form a dressing tool, optionally with a continuous

abrasive rim. However, consistent with the geometry of this tool design, the patent teaches that the tool is used to dress a straight face wheel and the tool would not be useful for dressing a profile into the face of a grinding wheel.

EP-B-116668 discloses a dressing tool having a single layer of electroplated  
 5 diamond grains arranged in a geometric design similar to that of the tool of U.S.-A-4,915,089. In contrast to the active braze bond used in the tools of the invention, with the electroplated bond of the EP-B-116668 tool, poorer diamond grains retention, shorter tool life and higher manufacturing costs are predicted.

## 10 Summary of the Invention

The invention is a rotary profile dressing tool having a rigid, disc-shaped core and an abrasive rim around at least one surface of the periphery of the core, the core and the abrasive rim being oriented in a direction orthogonal to the axis of rotation of the tool, wherein the abrasive rim comprises an abrasive component bonded to the  
 15 core by means of an active braze, and the abrasive component is selected from the group consisting of diamond grains arranged in a single layer and diamond film inserts, and combinations thereof. In an alternative design, the abrasive rim comprises a plurality of abrasive inserts mechanically fastened to the core of the tool, and the abrasive inserts comprise an abrasive component bonded to a backing element by  
 20 means of an active braze, and the abrasive component is selected from the group consisting of diamond grains arranged in a single layer and diamond film inserts, and combinations thereof.

## Description of the Drawings

25 Fig. 1 is an illustration of the operation of a rotary profiling dresser of the invention showing a grinding wheel with a profiled grinding face.

Fig. 2 is a planar view of a rotary profile dressing tool of the invention.

Fig. 3 is a partial cross-section of a single layer of diamond abrasive grain brazed onto a backing element in the rotary profile dressing tool of the invention.

30 Fig. 4 is a partial cross-section of a single layer of diamond abrasive grain brazed onto a rotary profile dressing tool of the invention without a backing element.

Fig. 5 is a partial cross-section of a diamond film insert brazed onto a backing element in the rotary profile dressing tool of the invention

#### Description of the Preferred Embodiments

5 As shown in Figure 1, the dressing tools of the invention are effective in profile dressing and truing operations carried out on abrasive grinding wheels. The dressing tool 3 is rotated about an axis (depicted in Fig. 1, with a dashed line numbered 5) and moved into contact with the profiled face 2 of the grinding wheel 1 in a direction along either an X axis (arrow 6) or a Y axis (arrow 7) as needed to dress  
10 or true the profile of the wheel.

As used herein, “true” (or truing) refers to operations used to make a grinding wheel round and profiled into the desired contours. Dress or dressing refers to operations used to open the grinding surface (or face) of the grinding wheel to improve grinding efficiency and avoid workpiece burn or other damage caused as the  
15 wheel face dulls during grinding. The wheel face dulls, for example, when the exposed sharp abrasive grains have been consumed, or the wheel face becomes smooth due to failure of the bond to erode and expose new grain or due to loading of the wheel face with debris from grinding operations.

Some operations permit a single dressing tool to be used simultaneously for  
20 both purposes and others do not. Truing is generally required when a grinding wheel is first mounted on a machine for use and whenever operations cause the wheel to go out of round or lose its contour. Depending upon the particular grinding operation, the dressing tools of the invention may be used to true or to dress or to do both.

A typical rotary dressing tool of the invention is illustrated in planar view in  
25 Fig. 2. A single layer of the diamond grain 8 is embedded in a metal braze 9 and bonded to the metal core 11 of the tool. The metal core of the tool contains a central hole for mounting the tool onto an drive spindle of a machine equipped with a means for rotating the tool around an axis 5. Also depicted in Fig. 2 is an optional feature of the invention consisting of four holes 12 around the central arbor hole for attaching  
30 the metal core of the tool to a support element (not shown).

As shown in Figs. 3-5, the abrasive rim 4 of the dressing tool 3 may be constructed in one of several preferred embodiments. In Fig. 3, the abrasive grain 8

and braze 9 are supported by a backing element 13 which is part of the unitary construction of the metal core 10. In Fig. 4, the abrasive grain 8 and the braze 9 are self-supporting and are brazed to the metal core 10 only along the inner diameter of the abrasive rim 4. Such a construction has the advantage that the dressing tool  
 5 having exposed abrasive grain on each side of the tool may be operated in either direction along the X axis (arrow 6) so as to approximately double the efficiency of the dressing operation and, thus, to generate profiles previously unobtainable with a single tool setup.

In either construction, after brazing, the diamond grains 8 are submerged  
 10 within the braze 9 layer and are not necessarily visible in the manner of metal bonded single layer abrasive cutting tools. Such a self-supporting abrasive component cannot be constructed if utilizing an electroplating process to bond the abrasive grain to the core of the dressing tool because the electroplated metal diamond composite would lack sufficient strength to be used. It is only possible when making a brazed single  
 15 layer diamond abrasive tool utilizing an active braze wherein the diamond grains function as a structural element of the tool, as described herein.

As shown in Fig. 5, a diamond film insert 14 may be bonded to the metal core 10 with an active braze 15 to construct a preferred embodiment. As used herein, diamond film refers to a thin layer of material made by a CVD or jet plasma process,  
 20 with or without diamond seed particles, consisting of approximately 100% diamond. Examples of diamond film preparations are provided in US- A-5,314,652; US-A-5,679,404; and US-A-5,679,446 which are hereby incorporated by reference. The diamond film is made into a thin layer (e.g., 100 to 1,000 microns) having the desired size for a tool insert and then the diamond film insert is brazed to the backing element  
 25 13 portion of the metal core 10 in substantially the same manner, and with the same types of brazes, as the diamond abrasive grains are brazed to the metal core.

These preferred embodiments differ from the prior art in several significant ways. The abrasive components depicted in Figs. 3-5 require less drastic finishing operations to achieve the precise surfaces desired for dressing tools. Like PCD  
 30 inserts, diamond film inserts (Fig. 5) are flat films. As for the single layer diamond abrasive grain embodiments (Figs. 3 and 4), some initial grinding of the surface may



be needed, but the single layer of grain eliminates much of the uneven character of a composite matrix of abrasive grain in a powdered metal bond.

The dressing tools of the invention are designed to present the same tip radius to the wheel face throughout the life of the dressing tool because the width of the single layer of diamond grain (or the diamond film insert) is not affected by the dressing operation. As the outermost diamond grain is consumed, a single grain below it is present at the radial tip of the dressing tool and the radius of the dressing tip remains constant as the tool is used. Thus, the tools of the invention are self-sharpening and maintain a precise geometry as they are consumed.

In further contrast to the prior art tools, the dressing tools of the invention have a long life and superior efficiency in dressing and truing grinding wheels.

The angle of the backing element may range from 0 to 90°, preferably from 10 to 45°, and most preferably ranges from 15 to 30° in dressing tools designed for use on vitrified grinding wheels.

In constructing the tools of the invention, brazing is typically carried out at 600-900° C, utilizing an active braze, and preferably at 800-900° C utilizing an active bronze or nickel braze. An "active braze" is a braze containing at least one material (e.g., titanium or chromium) that is chemically reactive with the surface of the diamond grain. When heated, the braze creates a chemical bond between the braze material, the diamond grain, and, optionally the metal core of the tool. A preferred active bronze braze is made from a mixture of copper, tin and titanium hydride powders, optionally with the addition of silver powder, by the method described in commonly owned U.S. Ser. No. 08/920,242, filed August 28, 1997, the contents of which are hereby incorporated by reference. A preferred active braze comprises 79 wt% copper, 15 to 25 wt% tin and 6 to 20 wt % titanium.

Another preferred active braze suitable for use in the invention is a nickel braze, comprising 60 to 92.5 wt% nickel, preferably 70 to 92.5 wt % nickel, and 5 to 10 wt% chromium, 1.0 to 4.5 wt% boron, 1.0 to 8.0 wt % silicon and 0.5 to 5.0 wt % iron. The nickel braze optionally comprises other materials, such as 0.1 to 10 wt % tin.

The rigid, disc-shaped core is constructed of a wear resistant material having a use life complementary to the life of the diamond abrasive component. Steel,

particularly tool steel, tungsten carbide, iron, cobalt, and composites thereof and combinations thereof, are suitable for use in the core. Steel is preferred. Suitable composites include ceramic particles or fibers contained in a metal matrix continuous phase. The core may be molded or machined into the desired tool dimensions by methods well known in the art.

Figures 2-5 show a continuous abrasive rim construction. In an alternative embodiment, the abrasive component is inserted as strips along the metal core. The strips may rest within indentations upon a backing element, or they may be filled into slots machined into and through the perimeter of the metal core.

In another embodiment of the invention (not shown in the drawings) the layer of brazed diamonds is present as a plurality of offset strips located alternately on the periphery of either of the two sides of the rigid core. In this zig-zag configuration, the periphery of the rigid core appears fluted and the diamond is brazed in strips within the indentations of the fluted periphery.

In another embodiment of the invention (not shown the drawings) the diamond is brazed to a backing element to form an abrasive insert and a plurality of the abrasive inserts are mechanically fastened (e.g., bolted) to the periphery of the rigid core.

Other embodiments are suited for use in the rotary profile dressing tools of the invention, provided the diamonds are oriented such that a set of diamond grains at any given point around the periphery of the tool is presented to the face of the wheel as a single cutting point and, as this single diamond point is worn, the set of remaining diamond grains consecutively presents another diamond grain to replace the worn one and become the single cutting point until the set has been exhausted.

#### Example 1

A test tool was constructed from a 10 cm (4 inch) outer diameter stainless steel (304L) core by vacuum brazing approximately 100% concentration of SDA 100+ diamond grit (425 to 500 microns, obtained from DeBeers) onto a 20° included angle backing element on the rim of the core. The tool was designed to yield a dressing tip radius of about 0.25 mm (0.01 inch), a radius approximately equal to the radius of the diamond grit selected for the tool after a minor amount of grinding to finish the abrasive component to the desired initial dressing tip radius.

Brazing was carried out at 880° C utilizing an active bronze braze. The active bronze braze was made from a mixture of 100 parts by weight of 77/23 copper/tin alloy powder and 10 parts by weight of titanium hydride powder. The powder mixture was blended at 13 wt % with Braz™ organic binder to make a paste composition, and the paste was spread onto designated portions of the rim of the metal core of the tool. Diamond grain was dusted onto the paste in a single layer and excess diamond grain was shaken off of the tool. The tool was oven dried to evaporate the water from the binder and the dried tool was heated to 880° C for 30 minutes under a low oxygen atmosphere at less than 0.133 Pa ( $<10^{-3}$  Torr) pressure, and then permitted to cool. In the finished tool, the braze contained 70.2 wt% copper, 21.0 wt% tin and 8.8 wt% titanium.

A second tool was made in the same fashion, except that the dressing tip radius was 0.12 mm (0.005 inch) and the diamond grit size was 0.212 to 0.25 mm.

The 0.25 mm (0.01 inch) tip radius tool was tested in a commercial setting on thread grinders. The grinding wheels were 46 x 1.3 x 25 cm (18 x 0.50 x 10 inch), 3SG100-VBX467 (sol gel alumina abrasive grain) wheels (obtained from Norton Company, Worcester, MA) operating at 30 surface meters/second (6000 surface feet/minute) during dressing, at an infeed of 0.013 mm (0.0005 inch) per pass after the initial form dressing (0.025 mm (0.001 inch) per pass). No wear of the abrasive component of the dresser was observed after 12 weeks of continuous operation. This compares favorably to a typical commercial rotary dressing tool used in this commercial setting which has measurable wear after 6 weeks of continuous operation. In addition, about 50% improvement in grinding wheel productivity was observed due to the sharpness of the rotary dressing tool.

The 0.12 mm (0.005 inch) tip radius tool was tested in the same commercial setting and has shown very little measurable wear after 5 weeks of continuous operation (i.e., about 2 microns per day).

### Example 2

A dressing tool was constructed utilizing a 15 cm (6 inch) stainless steel core having slots preformed along the rim into which 0.60-0.71 mm (about 0.025 inch) diameter diamond grains were brazed to yield a tool with a dressing tip radius of 0.3 mm (0.012 inch). The diamond was brazed into the slots using the braze and the

9

We claim:

1. A rotary profile dressing tool having a rigid, disc-shaped core and an abrasive rim around at least one surface of the periphery of the core, the core and the abrasive rim being oriented in a direction orthogonal to the axis of rotation of the tool, wherein  
5 the abrasive rim comprises an abrasive component bonded to the core by means of an active braze, and the abrasive component is selected from the group consisting of diamond grains arranged in a single layer and diamond film inserts, and combinations thereof.
2. The rotary dressing tool of claim 1, wherein the abrasive rim further comprises  
10 a backing element upon which the abrasive component is brazed.
3. The dressing tool of claim 1, wherein the rigid core consists of a material selected from the group consisting of steel, tool steel, tungsten carbide, iron and cobalt, and reinforced composites thereof, and combinations thereof.
4. The dressing tool of claim 1, wherein the active braze is a bronze braze  
15 containing an effective amount of titanium to react with the abrasive component.
5. The dressing tool of claim 4, wherein the active braze comprises 55 to 79 wt% copper, 15 to 25 wt% tin and 6 to 20 wt % titanium.
6. The dressing tool of claim 1, wherein the abrasive component is diamond grains and the diamond grains have an average diameter of 0.15 to 2.0 mm.
- 20 7. The dressing tool of claim 6, wherein the abrasive rim has a tip radius equal to about one-half of the average diameter of the diamond grains.
8. The dressing tool of claim 2, wherein the core and the backing element are of a unitary construction.
9. The dressing tool of claim 1, wherein the active braze comprises 60 to 92.5  
25 wt% nickel, 5 to 10 wt% chromium, 1.0 to 4.5 wt% boron, 1.0 to 8.0 wt % silicon and 0.5 to 5.0 wt % iron.
10. The dressing tool of claim 9, wherein the active braze further comprises 0.1 to 10 wt % tin.
11. A rotary profile dressing tool having a rigid, disc-shaped core and an abrasive  
30 rim around at least one surface of the periphery of the core, the core and the abrasive rim being oriented in a direction orthogonal to the axis of rotation of the tool, wherein the abrasive rim comprises a plurality of abrasive inserts mechanically fastened to the

periphery of the core, and the abrasive inserts comprise an abrasive component bonded to a backing element by means of an active braze, and the abrasive component is selected from the group consisting of diamond grains arranged in a single layer and diamond film inserts, and combinations thereof.

12. The rotary profile dressing tool of claim 11, wherein the abrasive inserts are bolted to the core.

10

ABSTRACT

A disc-shaped, rotary dressing tool has a rigid core and an abrasive rim around  
5 at least one surface of the periphery of the rigid core, the rigid core and the abrasive  
rim being oriented in a direction orthogonal to the axis of rotation of the tool. The  
abrasive rim comprises an abrasive component bonded to the rigid core by means of  
an active braze, and the abrasive component is diamond grains arranged in a single  
layer or diamond film inserts. The abrasive rim may comprise a plurality of abrasive  
10 inserts mechanically fastened to the rigid core and comprising an abrasive component  
bonded to a backing element by means of an active braze.

15 #24698.03

2015-01-01 00:00:00

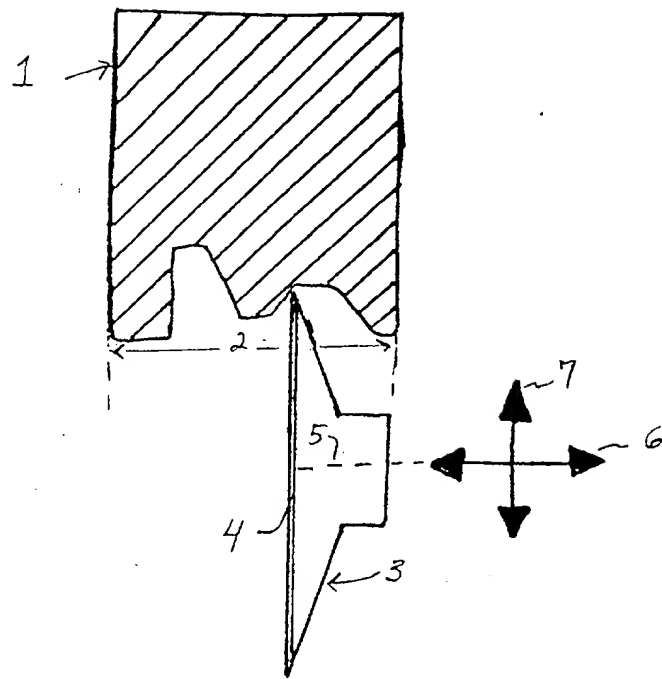


Fig. 1

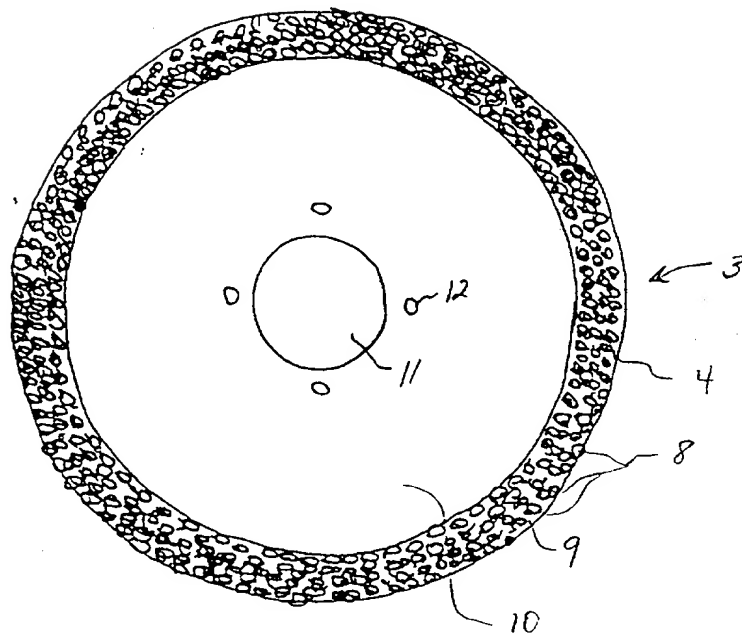


Fig. 2



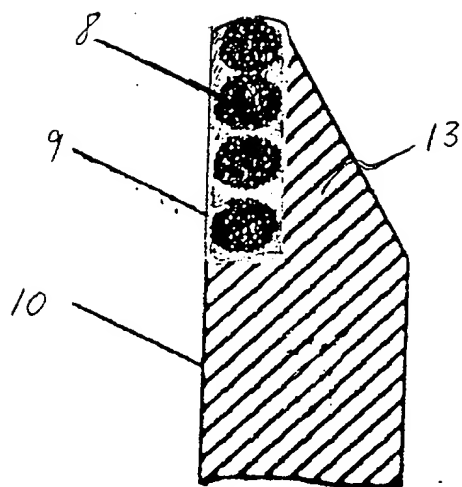


Fig. 3

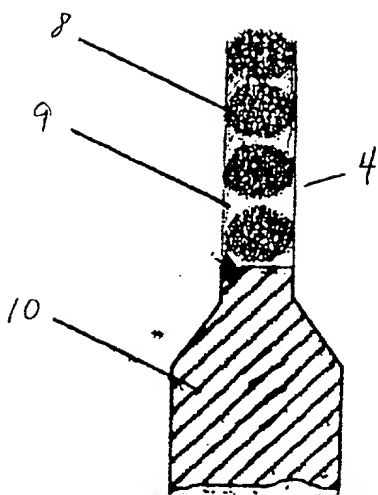


Fig. 4


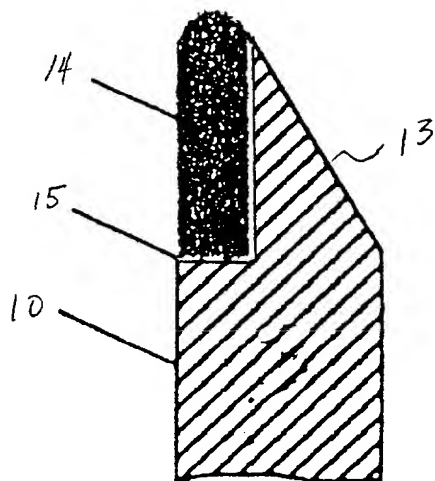


Fig. 5

# United States Patent & Trademark Office

Office of Initial Patent Examination -- Scanning Division

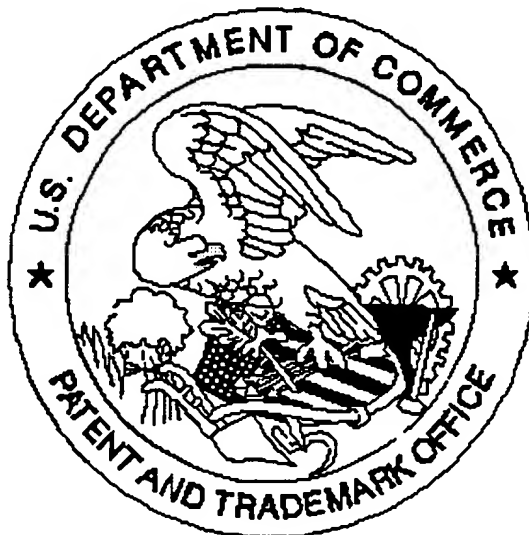

## Application deficiencies found during scanning:

1. Application papers are not suitable for scanning and are not in compliance with 37 CFR 1.52 because:
  - ☐ All sheets must be the same size and either A4 (21 cm x 29.7 cm) or 8-1/2" x 11". Pages \_\_\_\_\_ do not meet these requirements.
  - ☐ Papers are not flexible, strong, smooth, non-shiny, durable, and white.
  - ☐ Papers are not typewritten or mechanically printed in permanent ink on one side.
  - ☐ Papers contain improper margins. Each sheet must have a left margin of at least 2.5 cm (1") and top, bottom and right margins of at least 2.0 cm (3/4").
  - ☐ Papers contain hand lettering.
2. Drawings are not in compliance and were not scanned because:
  - ☐ The drawings or copy of drawings are not suitable for electronic reproduction.
  - ☐ All drawings sheets are not the same size. Pages must be either A4 (21 cm x 29.7 cm) or 8-1/2" x 11".
  - ☐ Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin of at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8").
3. Page(s) \_\_\_\_\_ are not of sufficient clarity, contrast and quality for electronic reproduction.
4. Page(s) \_\_\_\_\_ are missing.
5. OTHER: No Declaration(s) Enclosed